

# VOLTIVE

## Product Specification

### 14-2


#### Description

14 AWG, 2 Conductors, Speaker Cable, Stranded, Oxygen Free Copper, UL Direct Burial, CL3 & FT4, Rated for In Wall and Direct Burial Applications.

#### Variants

V-14X2-CL3-BK-100	Black outer jacket, 100ft. spool
V-14X2-CL3-WH-100	White outer jacket, 100ft. spool

#### Construction

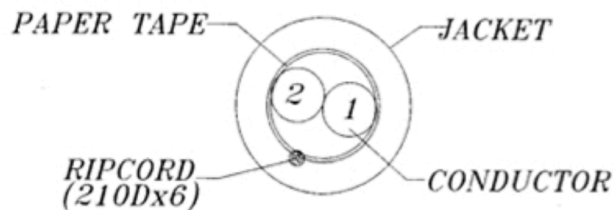

#### Conductors

Gauge	14AWG
Quantity	2
Material	Oxygen Free Copper
Strand Count	105
Strand Diameter	0.157mm ± 0.003mm
Overall Diameter	1.86mm

## Insulation

Material	Polyvinyl Chloride (PVC)
Nominal Thickness	0.35mm ± 0.08mm
Insulation Diameter	2.7mm ± 0.2mm
Colors	Red, Black

## Paper Tape

Coverage	≥ 125%
----------	--------

## Rip Cord

Material	Nylon
Construction	1000D

## Jacket

Material	Polyvinyl Chloride (PVC)
Nominal Thickness	0.88mm ± 0.1mm
Outer Diameter	7.20mm ± 0.3mm
Marking	VOLTIVE 14/2 OFC SPEAKER WIRE - PART # - MM/DD/YY - DIRECT BURIAL - 14AWG 2C E301442-88 (UL) CL3 75C - ROOM: ENT KIT DIN LIV FAM OFF   MBR MBA BR1 BR2 BR3 BR4 BA1 BA2 HALL   BSMT ATT THTR PAT POOL GAR - JACK: 1 2 3 4 5 6   N S E W - <a href="http://VOLTIVE.COM">VOLTIVE.COM</a> - XX USED / XX REMAINING

## Standards and Certifications

Fire Safety Ratings	c(UL) CMG or (UL) CL3
Flame Test	FT4
Application	Power limited circuit cables for use as fixed wiring within buildings (some are also marked for direct burial) principally for Class 3 and Class 2 circuits.
Standard	UL 13
Performance Ratings	(UL) Direct Burial
Additional Certifications	Restriction of Hazardous Substances (RoHS)

## Electrical Properties

Nominal Temperature	20°C
Maximum Conductor Resistance	8.6 $\Omega$ /km
Voltage	300 Volts
Operating Temperature	-20°C to 75°C
Minimum Insulation Resistance	100M $\Omega$ /km
Dielectric Strength	AC-500V/1 Minute
Spark Test	2.5 KV for 0.15 seconds