



Product Specification

10-2


Description

10 AWG, 2 Conductors, Speaker Cable, Stranded, Oxygen Free Copper, UL Direct Burial, CL3 & FT4, Rated for In Wall and Direct Burial Applications.

Variants

NX-10X2-CL3-BK-250	Black outer jacket, 250ft., pull box
NX-10X2-CL3-BK-500	Black outer jacket, 500ft., spool
NX-10X2-CL3-WH-250	White outer jacket, 250ft., pull box
NX-10X2-CL3-WH-500	White outer jacket, 500ft., spool

Construction

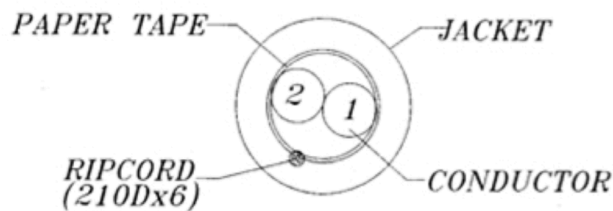

Conductors

Gauge	10AWG
Quantity	2
Material	Oxygen Free Copper
Strand Count	105
Strand Diameter	0.251mm ± 0.003mm
Overall Diameter	2.97mm

Insulation

Material	Semi-rigid Polyvinyl Chloride (SR-PVC)
Nominal Thickness	0.50mm ± 0.08mm
Insulation Diameter	4.0mm ± 0.2mm
Colors	Red, Black

Paper Tape

Coverage	≥ 125%
----------	--------

Rip Cord

Material	Nylon
Construction	150D

Jacket

Material	Polyvinyl Chloride (PVC)
Nominal Thickness	0.9mm ± 0.1mm
Outer Diameter	10mm ± 0.3mm
Marking	NEXT 10/2 OFC SPEAKER WIRE - PART # - MM/DD/YY - DIRECT BURIAL - 10AWG 2C E301442-88 (UL) CL3 75C - ROOM: ENT KIT DIN LIV FAM OFF MBR MBA BR1 BR2 BR3 BR4 BA1 BA2 HALL BSMT ATT THTR PAT POOL GAR - JACK: 1 2 3 4 5 6 N S E W - SHOP-NEXT.COM - XXX USED / XXX REMAINING

Standards and Certifications

Fire Safety Ratings	c(UL) CMG or (UL) CL3
Flame Test	FT4
Application	Power limited circuit cables for use as fixed wiring within buildings (some are also marked for direct burial) principally for Class 3 and Class 2 circuits.
Standard	UL 13
Performance Ratings	(UL) Direct Burial
Additional Certifications	Restriction of Hazardous Substances (RoHS)

Performance

Electrical Characteristics

Nominal Temperature	20°C
Maximum Conductor Resistance	3.41 Ω /km
Voltage	300 Volts RMS
Operating Temperature	-20°C to 75°C
Minimum Insulation Resistance	100M Ω /km
Dielectric Strength	AC-500V/1 Minute
Impedance (near by)	
Capacitance (near by)	

Mechanical Characteristics

Test Object	Jacket
Test Material	Polyvinyl Chloride (PVC)
Before Tensile Strength	