



# Product Specification

## 16-2


### Description

16 AWG, 2 Conductors, Speaker Cable, Stranded, Oxygen Free Copper, UL Direct Burial, CL3 & FT4, Rated for In Wall and Direct Burial Applications.

### Variants

NX-16X2-CL3-BK-100	Black outer jacket, 100ft., spool
NX-16X2-CL3-BK-250	Black outer jacket, 250ft., pull box
NX-16X2-CL3-BK-500	Black outer jacket, 500ft., pull box
NX-16X2-CL3-WH-100	White outer jacket, 100ft., spool
NX-16X2-CL3-WH-250	White outer jacket, 250ft., pull box
NX-16X2-CL3-WH-500	White outer jacket, 500ft., pull box

### Construction

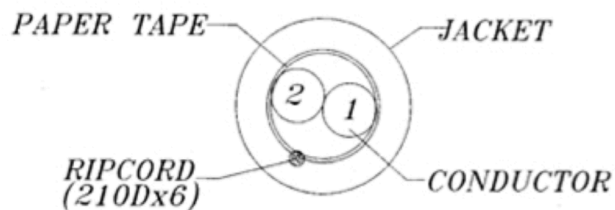

### Conductors

Gauge	16AWG
Quantity	2
Material	Oxygen Free Copper
Strand Count	65

Strand Diameter	0.157mm ± 0.003mm
Overall Diameter	1.46mm

## Insulation

Material	Semi-rigid Polyvinyl Chloride (SR-PVC)
Nominal Thickness	0.30mm ± 0.08mm
Insulation Diameter	2.10mm ± 0.20mm
Colors	Red, Black

## Paper Tape

Coverage	≥ 125%
----------	--------

## Rip Cord

Material	Nylon
Construction	6x 210D threads

## Jacket

Material	Polyvinyl Chloride (PVC)
Nominal Thickness	0.88mm ± 0.10mm
Outer Diameter	6.20mm ± 0.30mm
Marking	NEXT 16/2 OFC SPEAKER WIRE - PART # - MM/DD/YY - DIRECT BURIAL - 16AWG 2C E301442-88 (UL) CL3 75C - ROOM: ENT KIT DIN LIV FAM OFF   MBR MBA BR1 BR2 BR3 BR4 BA1 BA2 HALL   BSMT ATT THTR PAT POOL GAR - JACK: 1 2 3 4 5 6   N S E W - <a href="#">SHOP-NEXT.COM</a> - XX USED / XX REMAINING

## Standards and Certifications

Fire Safety Ratings	c(UL) CMG or (UL) CL3
Flame Test	FT4
Application	Power limited circuit cables for use as fixed wiring within buildings (some are also marked for direct burial) principally for Class 3 and Class 2 circuits.
Standard	UL 13
Performance Ratings	(UL) Direct Burial

Additional Certifications	Restriction of Hazardous Substances (RoHS)
---------------------------	--

## Performance

### Electrical Characteristics

Nominal Temperature	20°C
Maximum Conductor Resistance	15.6 Ω/km
Voltage	300 Volts RMS
Operating Temperature	-20°C to 75°C
Minimum Insulation Resistance	50M Ω/km
Dielectric Strength	AC-500V/1 Minute
Impedance (near by)	78Ω ± 4Ω
Capacitance (near by)	23 pF/Ft ± 1 pF/Ft

### Mechanical Characteristics

Test Object	Jacket
Test Material	Polyvinyl Chloride (PVC)
Before Tensile Strength	≥ 1.05 kp/mmP2